


TURBINE MIXERS FOR INDUSTRY...

Drive Series J and K

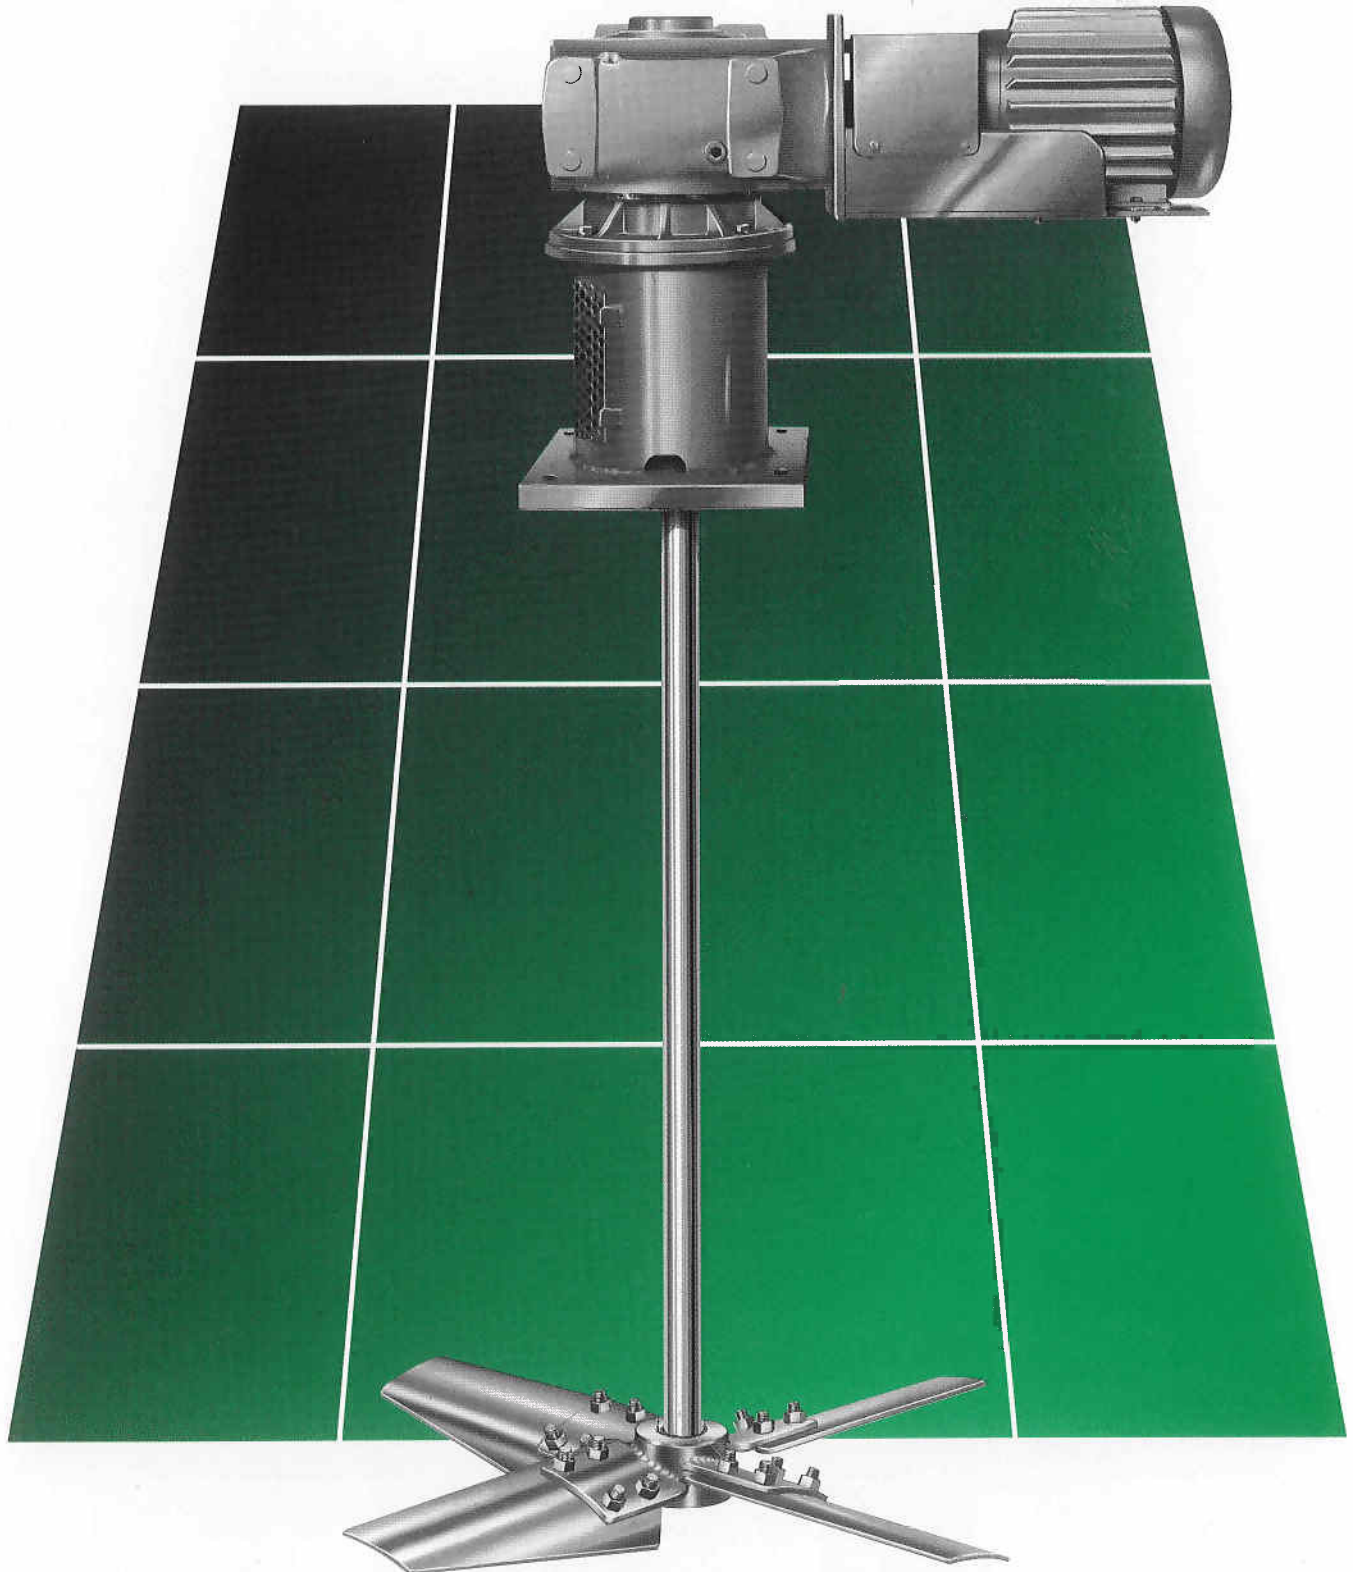

Agriculture

Biochemical

Brewing & Distilling

Chemical

Cosmetic

Explosives

Food Processing

Heat Treating

Mining

Oil & Refining

Paint & Coatings

Petrochemical

Pharmaceutical

Photographic

Plastics

Pulp & Paper

Rubber Products

Textile

Waste Treatment

Water Treatment

TURBINE MIXERS

Turbine mixers are used in a wide spectrum of applications including simple blending as well as viscous blending. They are well suited for applications which are controlled by tank circulation such as solids suspension, and heat transfer. They are frequently used in applications requiring fluid shear and mass transfer, for example; gas absorption, dissolution, crystallization and various reactions. MixMor designs the optimum energy-efficient mixer for every application while providing the level of performance necessary to do the job effectively.



THE DRIVE

Double reduction helical/worm gear or single reduction worm gear reducers provide a rugged, reliable drive with high shock load capacity for years of trouble-free service in the most challenging applications.

Housings are close-grained cast iron for corrosion resistance with oversized output shafts for high torsional and bending stresses running on heavy duty tapered roller bearings. Drywell construction produces a positive seal to eliminate lubricant leakage at the output shaft. Lubricant in the housing reservoir is automatically directed by splash to bearings and gears.

Reducer output speeds range from 25 to 175 rpm with 1 to 50 horsepower motors. Design incorporates the use of either foot mounted or 'C' face motors, both of which utilize flexible couplings or non-fretting quill drive for power transmission to the reducer.


IMPELLERS

Mixing applications have different process requirements and that is why MixMor's engineers have such a complete selection of impellers - ranging from the time proven, conventional pitched blade turbine to the state-of-the-art FloMor high-efficiency hydrofoil impeller. MixMor has the optimum impeller for your application.



FloMor - FM3, FM4, FM4W

The FloMor is a true axial flow hydrofoil impeller producing one of the most efficient flow patterns with low power consumption and shear. Available in three, four and wide blade designs for applications up to 50,000 centipoise.

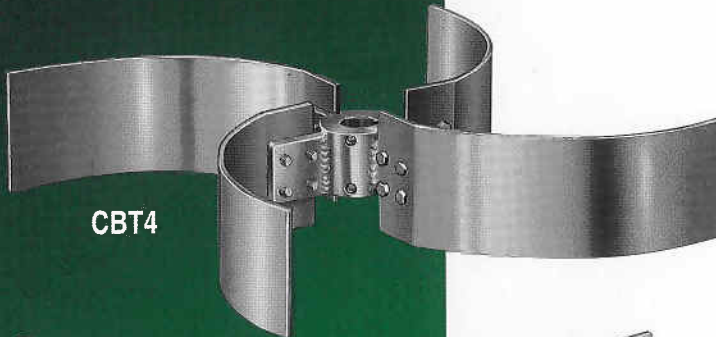


CURVED BLADE TURBINE - CBT4

The curved blade turbine impeller produces a radial flow pattern with less shear and power consumption than a vertical flat blade turbine. It is used in applications such as heat transfer, high solids contents or low liquid levels.



VERTICAL FLAT BLADE TURBINE - VFBT4, VFBT6

The vertical flat blade impeller is a radial flow design used widely in low liquid levels or high shear applications with higher power consumption than axial flow impellers. Four and six blade designs are available.

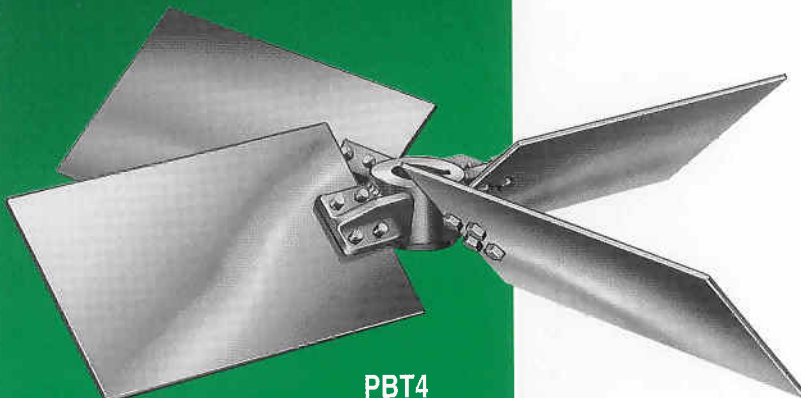

PITCHED BLADE TURBINE - PBT3, PBT4

This impeller produces an axial flow pattern with a balance of shear and pumping when viscosities, liquid levels or impeller size preclude the use of foils. It can be the most cost effective impeller for many applications. Designs incorporate three and four blades at 45° or 30° pitch.

RUSHTON TURBINE - FBBDT4, FBBDT6

The Rushton turbine impeller utilizes four or six vertical flat blades attached to a horizontal disk. It is typically used in conjunction with a sparge ring for gas dispersion applications.


CUSTOM IMPELLERS

In addition to our diverse selection of standard impellers, MixMor can design custom impellers that will solve your toughest mixing problems.

OPTIONAL SEALING ARRANGEMENTS


Vapor Seals to Mechanical Seals for Pressure Vessels.

Model TC

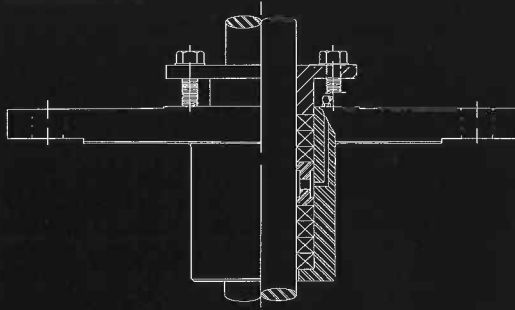


High pressure stuffing box for use on closed vessels with up to 150 psig pressure. The seal uses seven rings of packing and a lantern ring for lubricant distribution. Packing will be selected for your application.

Model TCL

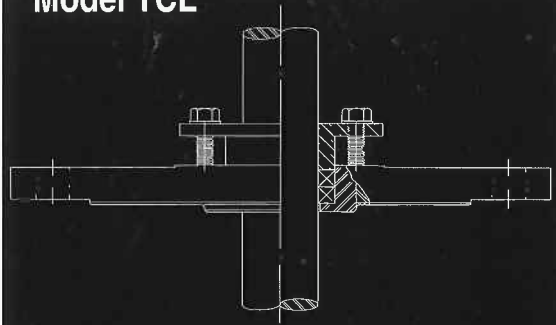


Low pressure stuffing box for use on closed vessels for vapor to 10 psig pressure. The seal uses two rings of self-lubricating packing. The packing furnished with the mixer will be selected to suit your application.

Model TCM

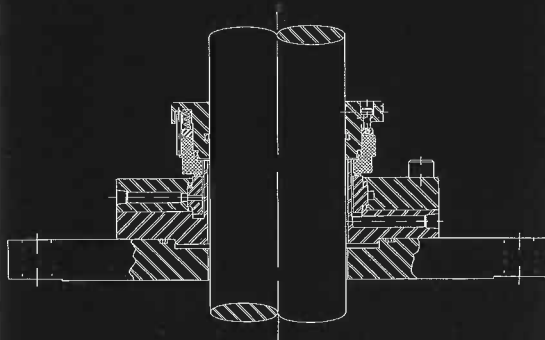

Mixers can be furnished with various types and manufacturers of mechanical seals including cartridge type double balanced, single and double dry running, metal bellows, tandem, water cooled, split and seals with sanitary containment glands.

Model TCV

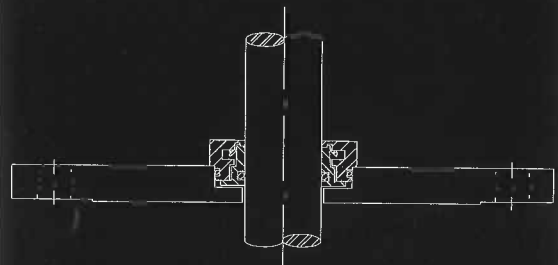

Various types of seals can be used to contain vapors in the tank including lip seals, labyrinth seals, 'V' rings, and excluder seals.

MixMOR

®